

Moduflex Valve System®

Flexibility for pneumatic users

Whether configured from basic components or ordered as a pre-assembled and tested valve island, **Moduflex flexibility** is unmatched in the market place.



Innovative

The 6 patents awarded to the Moduflex Valve System reflect that innovation is core to the Parker design process. Maintaining a clear understanding of our customer's expectations has defined the individuality of the Moduflex, and clearly differentiated it as a leading automation solution.

Adaptive

No other system can be adapted so simply once specified. Unique, captive fitting release system, quick release electrical connectors and single mechanical screw connection between manifolds offer the ultimate capability for late system design changes.

Multi-Functional

From stand-alone valves to fieldbus ready valve islands, from cylinder flow controls to vacuum generators with integrated blow-off, the Moduflex Valve System meets the requirements of the whole automation spectrum.

Moduflex Valve System

The Moduflex Valve System redefines flexibility for pneumatic users. Whether configured from basic components or ordered as a pre-assembled and tested valve island, Moduflex flexibility is unmatched in the market place.



V Series



T Series



Lockable Connector IP67

New for 2015



Clip Connector IP40

S Series



Lockable Connector IP67

New for 2015



Clip Connector IP40

P Series



Innovative

The 6 patents awarded to the Moduflex Valve System reflect that innovation is core to the Parker design process. Maintaining a clear understanding of our customer's expectations has defined the individuality of the Moduflex, and clearly differentiated it as a leading automation solution.

Adaptive

No other system can be adapted so simply once specified. Unique, captive fitting release system, quick release electrical connectors and single mechanical screw connection between manifolds offer the ultimate capability for late system design changes.

Multi-Functional

From stand-alone valves to fieldbus ready valve islands, from cylinder flow controls to vacuum generators with integrated blow-off, the Moduflex Valve System meets the requirements of the whole automation spectrum.

Light-weight

An As-i compatible valve manifold with 8 electrical inputs and 8 pneumatic outputs weighs a mere 800grams, making the Moduflex Valve System the perfect choice for end of arm tooling application.

Moduflex Valve technology

Two technology platforms enable the compact design and high performance of the Moduflex Valve System.

The compact dual 4/2 and 3/2 valves utilize well proven Parker seal technology. The standard 4/2 valves adopt the long life super durable ceramic switching technology.

Dual 4/2 valve




4/2 Valve



Moduflex Complete Control

With the introduction of the dual 4/2 size 1 valves, Moduflex now offers unrivaled ability of matching valves to exact flow requirements, ensuring cost and space are minimized. In addition, Moduflex Valve System offers all the necessary control peripherals to provide a complete automation solution. Moduflex is the complete control package.

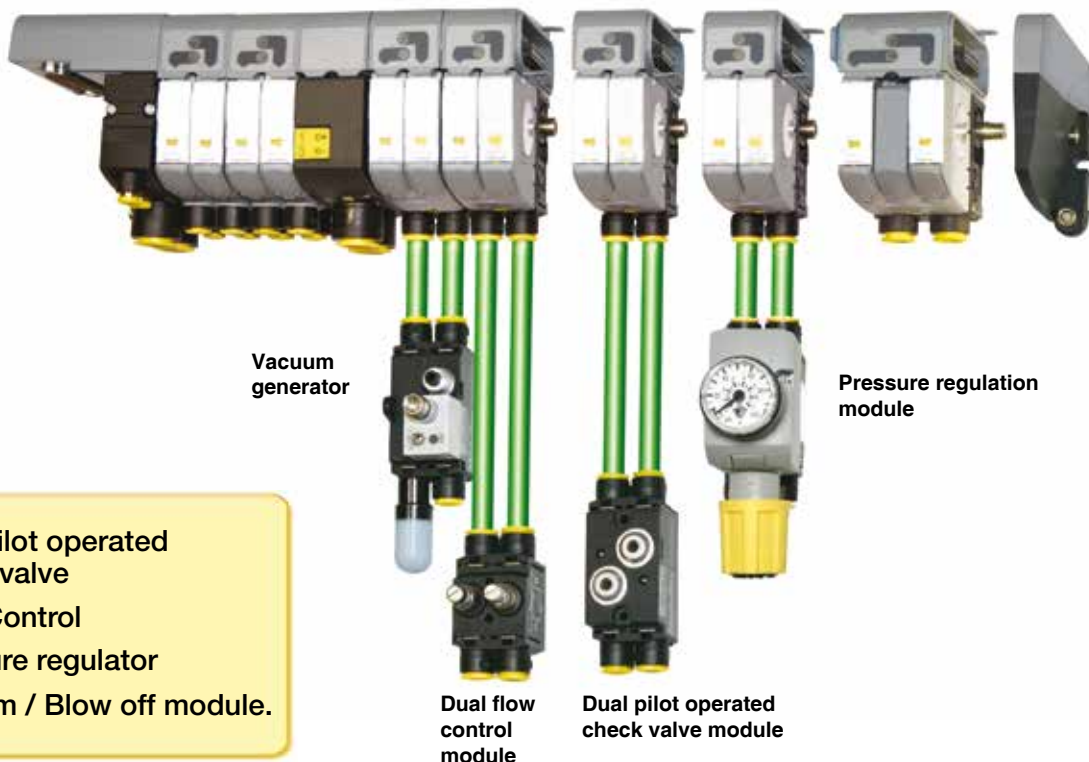

Vacuum generator

Pressure regulation module

- Dual pilot operated check valve
- Flow Control
- Pressure regulator
- Vacuum / Blow off module.

Dual flow control module

Dual pilot operated check valve module

With high performance technology, Moduflex opens a new era in the field of electro-pneumatic automation. Valves are easily assembled into compact islands that conform to any application requirement.

Adaptive pneumatic

With the Moduflex Valve design, pneumatic automation is now totally flexible.


- Valves may be stand-alone or assembled into short or long islands, depending on application.
- IP 65-67 water and dust protection allows valve to be installed near the cylinders for shorter response time and lower air consumption.
- The IP40 water and dust protection allows an optimized electrical connection for applications into cabinet or soft and none aggressive environments.
- Valve island electrical connections may be integrated.
- Push-in pneumatic connectors may be straight or elbow, for 4, 6, 8 or 10 mm OD tubes.
- A given island may incorporate different valve sizes in order to fulfill each cylinder flow requirement. A single island will accommodate all cylinders, up to 100 mm bore size.
- Island modifications are easy : add or remove a valve, change a valve function, change tubing size, change piloting in minutes.
- Manual overrides are also adaptive : locking for set up, non-locking for production, ...



stand-alone valve



short valve island

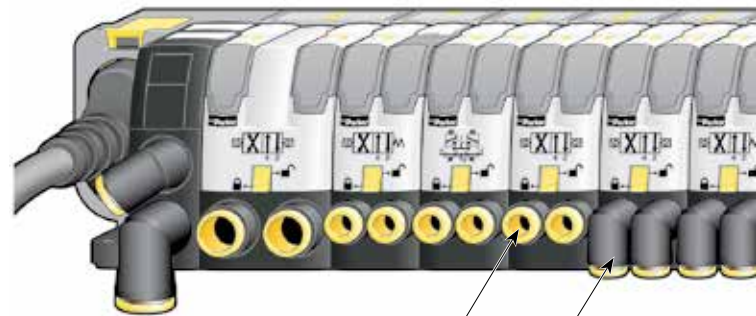


or long valve island




straight or elbow pneumatics connectors

Easy man-machine dialog

- Moduflex incorporates LED indicators, manual overrides (MAN), in conjunction with valve symbols and identification.
- As compared to traditional 5/2 valve islands, Moduflex offers a more user friendly dialog : each marking, LED and MAN are all lined up with the corresponding cylinder output.

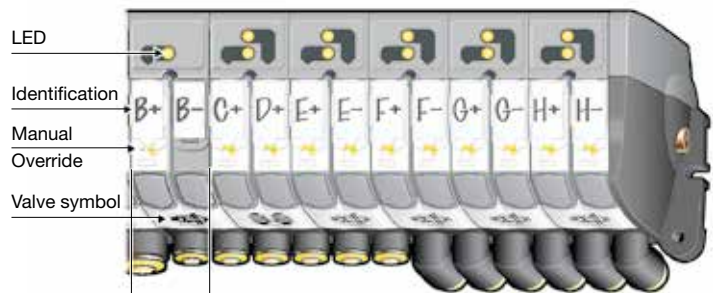


Island with traditional 5/2 spool valves :
Before any action, LED and MAN have to be carefully related to the corresponding output. Man-machine dialog is difficult.

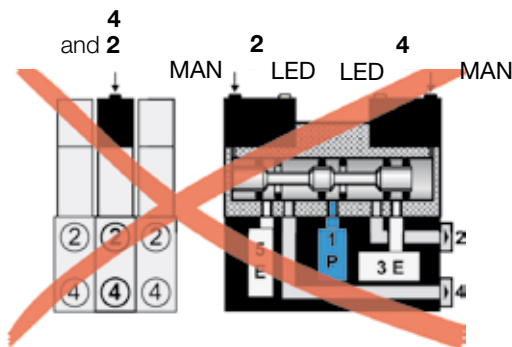

Island with Moduflex 4/2 slides valves:
Each marking, LED and MAN line up with the corresponding output. Man-machine dialog is easy.


Adaptive design

individual electrical connector
 Lockable M8 Connector - IP67 or Clip Connector - IP40

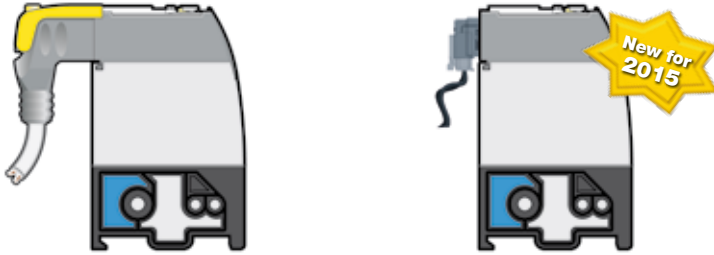

or Valve Bank with integrated IP65 electrical connections

3 valves sizes in the same valve bank

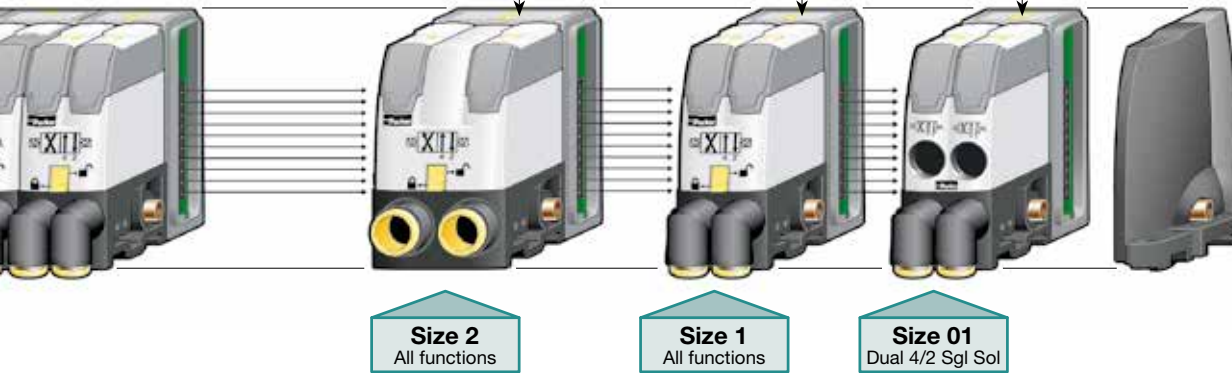

Flows and tube connections

Optimal nominal section for a full flow with appropriate fitting


3 valve sizes lead to a global choice of tube sizes, thus covering all usual applications

Size 2		Size 1		Size 01	
Nominal section 40 mm ²		Nominal section 12 mm ²		Nominal section 4 mm ²	
Qn 800 NI/mn* Qmax 1340 NI/mn*		Qn 310 NI/mn* Qmax 510 NI/mn*		Qn 165 NI/mn* Qmax 275 NI/mn*	
*) For 3/2 functions Qn 450 NI/mn Qmax 800 NI/mn		*) For 3/2 functions Qn 230 NI/mn Qmax 410 NI/mn			
Tube size to cylinder	Ø Ext. 10 mm	Ø Ext. 8 mm	Ø Ext. 6 mm	Ø Ext. 4 mm	Ø Ext. 4 mm
Cylinder bore size	Ø 63 to Ø 100 mm	Ø 40 to Ø 63 mm	Ø 25 to Ø 40 mm	Ø 6 to Ø 25 mm	Ø 6 to Ø 25 mm



Adaptive pneumatic connection

Valve outputs are equipped with clip-on push-in tube connectors with a choice of straight or elbow in different sizes

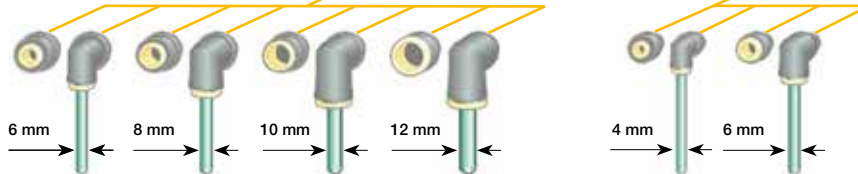

Typical cylinder speeds are shown on next pages. Module size, tube diameter and length, cylinder size, load and exhaust collection are taken into account.


Operating information

Working pressure	-0,9 to 8 bar
Pilot pressure	3 to 8 bar *
Working temperature	-15 °C to 60 °C
Protection individual connectors	IP 67 NEMA4
Protection integrated connectors	IP 65
Voltage	24 V DC
* Single and double 3/2	3,5 to 8 bar


		Dual 4/2	Dual 3/2	3/2	4/2
Size 1	Qmax.	275 l/min	415 l/min	415 l/min	510 l/min
	Qn	165 l/min	235 l/min	235 l/min	310 l/min
Size 2	Qmax.	-	805 l/min	805 l/min	1340 l/min
	Qn	-	450 l/min	440 l/min	800 l/min

Total ordering flexibility

Additionally to the complete product adaptability, the Moduflex Valve range offers for V, T, S and P series an ordering flexibility with 3 different designs; from all components separately ordered (basic module) to pre-assembled and tested valve island.

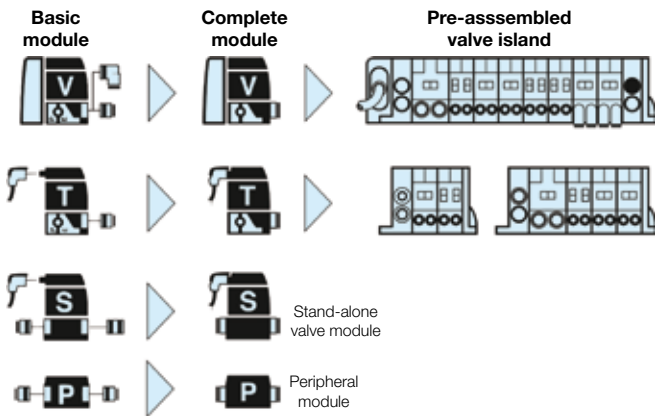

The Moduflex Valve Island in-line e-Configurator software is the easy way to, step by step, configure and order the required valve island for the application.

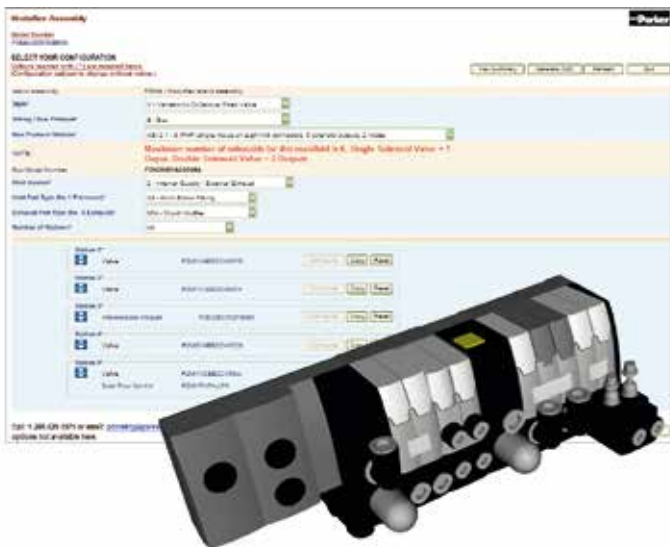

Ordering options

1 - Basic modules ordering

Using this option, all basic components are separately ordered :

- Head and Tail set
- Valve modules
- Intermediate module kit
- Peripheral modules
- Pneumatic connectors, mufflers and plugs
- Electrical connection or fieldbus module

The complete bill of material needed for the valve island assembly can be easily details using page 1 of the Moduflex Valve Configurator software report.

2 - Complete modules ordering

Using this option, modules are defined, ordered and supplied, pneumatic connectors and electrical connection equipped. One part number defines :

- Function module
- Pneumatic connectors, muffler and plugs
- Electrical connection and cable

For an entire valve island configuration, the list of complete modules can be easily details using page 3 of the Moduflex Valve Configurator software report.

3 - Pre-assembled valve islands ordering

Using this option, the complete valves island configuration has to be defined, and may be ordered, delivered fully assembly and tested under one part number.

The Moduflex Valve in-line e-Configurator software is an easy way for a clear definition of the requested valve island configuration.

V series

Integrated connection field bus
 or multi-connector valve island



T series

Individual connector valve islands
 Solenoid clip or lockable connector
 or remote air pilot



S series

Stand alone valves
 Solenoid clip or lockable connector
 or remote air pilot




P series

Peripheral modules
 Flow control, check valves,
 pressure regulator, vacuum



Moduflex Valve in-line e-Configurator

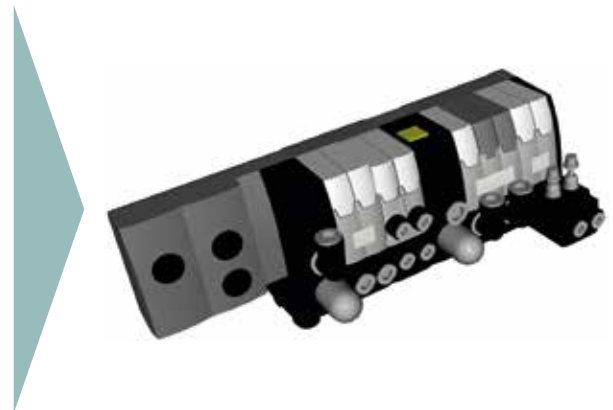

Integrated connections valve islands : V series

In a V series Moduflex valve island, electrical controls are all received by the head module and transmitted to the concerned valve modules through the modular integrated circuit.

The head module may either be a cable multi-connector or a Fieldbus communication module : the next pages show multi-connector cable and a complete choice of bus protocols.






Valve island configuration

The following page shows all valve sizes and functions that may enter into a V series valve island and, for each valve size, a choice of clip-on pneumatic connectors : tubing size, straight, elbow...
 To receive its pressure supply and collect its exhaust, the island also requires a pneumatic

head and tail module set and sometimes an intermediate module set with 4 configuration plates for different functions. To receive its electrical controls, the island is completed by an electrical head module, either a multi-connector or by a bus module to be chosen from the next pages.

Valve island electrical head module :
 multi-connector or field bus connection

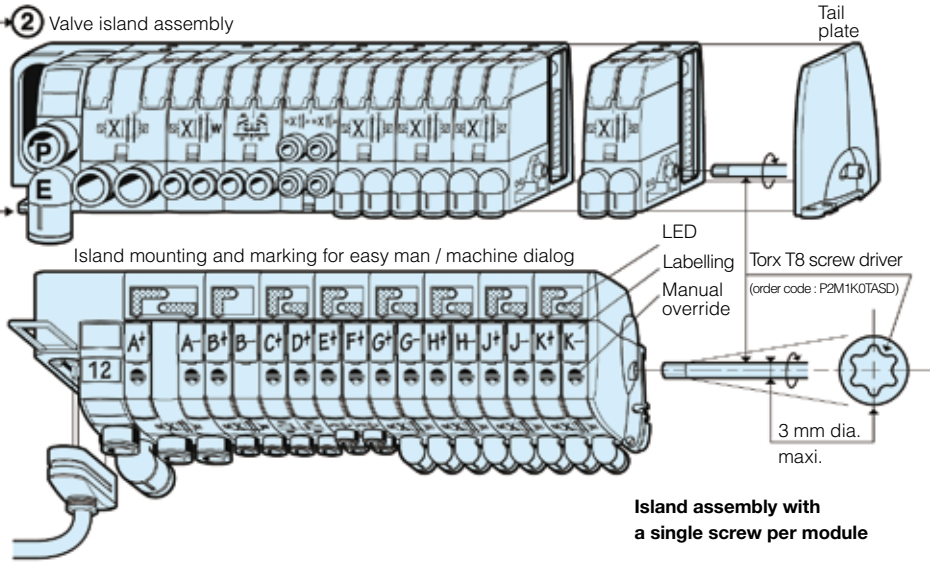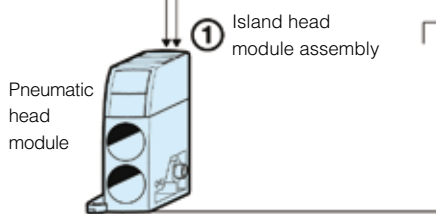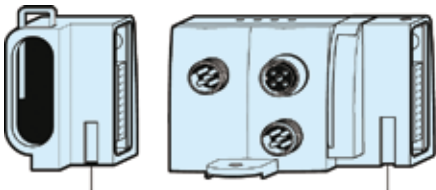

Valve island assembly

The above illustration presents :

- **Step 1** : the electrical head module is engaged into the pneumatic head module ;
- **Step 2** valve modules are one by one screwed onto each other starting from the head module. For this task, the single integrated screw is tightened with a torx T8 standard screwdriver.

Island assembly with a single screw per module

The pneumatic connectors may be clipped or unclipped at any stage.

With a LED, a manual override and a labelling for each valve pilot (see illustration), the island front face eases the "man / machine" dialog.

The resulting valve island length is expressed by the drawing below, while further size details and mountings are presented on dimensions pages.

Modules and island ordering

Choice between 3 approaches :

1 - Basic modules ordering :

The following page shows these modules supplied without connector, together with the choice of clip-on connectors separately supplied (10 units packs). This approach gives the maximum flexibility.

2 - Complete modules ordering :

Page 265 shows the ordering chart for modules supplied with their connectors.

3 - Assembled island ordering :

Page 268 shows the valve island configurator CD-Rom to specify a valve island that may be delivered assembled.

Field bus head module :
 ■ width : 94 mm


Multi-connector head module :
 ■ guillotine, width : 47 mm
 ■ sub-D 25, width : 56 mm

Valve modules size 1 :
 ■ width : 25 mm

Valve module size 2 :
 ■ width : 37.5 mm











Intermediate module :
 ■ width : 25 mm

Tail plate :
 ■ width : 16 mm

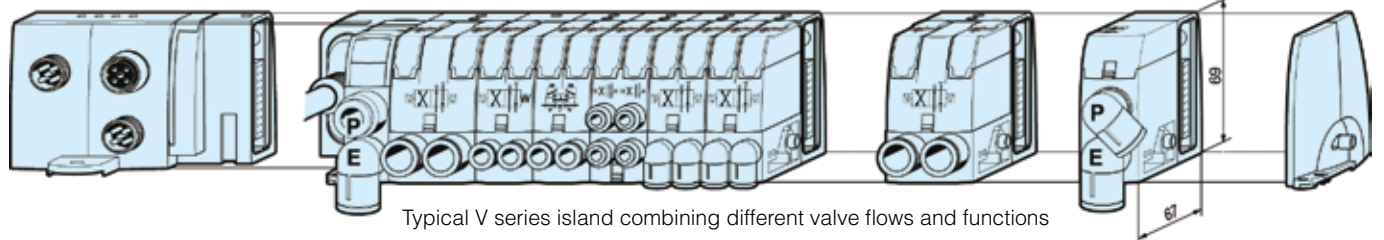


Typical V series island combining different valve flows and functions




Basic modules (without connector)

Valve Modules			Size 1		Size 2	
	Symbol	Description	Weight (g)	Order code	Weight (g)	Order code
 <p>Size 1</p>		4/2 Solenoid spring	94	P2M1V4ES2CV	100	P2M2V4ES2CV
		4/2 Double solenoid	103	P2M1V4EE2CV	110	P2M2V4EE2CV
		2 x 3/2 NC + NC with exhaust check valves	106	P2M1VDEE2CV	115	P2M2VDEE2CV
		2 x 3/2 NO + NO with exhaust check valves	106	P2M1VCEE2CV	115	P2M2VCEE2CV
 <p>Size 2</p>		2 x 3/2 NC + NO with exhaust check valves	106	P2M1VEEE2CV	115	P2M2VEEE2CV
		2 x 4/2 Solenoid spring with exhaust check valves	114	P2M1VJEE2CV		
		3/2 NC with exhaust check valves	102	P2M1V3ES2CV	110	P2M2V3ES2CV
		4/3 Centre exhaust 2 x 3/2 NC + NC without exhaust check valves	106	P2M1VGEE2CV	115	P2M2VGEE2CV

Island head and intermediate module sets

Valve Modules	Description	Weight (g)	Order code
 <p>P2M2HXT01</p>	Valve island pneumatic head and tail module set	64	P2M2HXT01
	Valve island intermediate supply module with a set of 4 configuration plates	68	P2M2BXV0A

Clip-On pneumatic connectors *



Valve Modules			Size 1		Size 2	
	Description	Tube OD	Weight (g)	Order code	Weight (g)	Order code
	Straight connector	G1/8"	2	FMDG1-1		
		4 mm	2	FMD04-1		
		6 mm	3	FMD06-1	3	FMD06-2
		8 mm			4	FMD08-2
		10 mm			5	FMD10-2
		12 mm			6	FMD12-2
	Elbow connector	G1/8"	3	CMDG1-1		
		4 mm	3	CMD04-1		
		6 mm	5	CMD06-1	5	CMD06-2
		8 mm			6	CMD08-2
		10 mm			7	CMD10-2
		12 mm			8	CMD12-2
	Silencer				5	MMDVA2
	Plug		3	PMDXX1	5	PMDXX2

* Fittings and plugs pack quantity : 10

Electrical multi-connection and field bus head modules

Multiconnector or field bus head module to be chosen from next pages.



V series valve island : Electrical multi-connector head module

Description	Protection	Cable length	Weight (g)	Order code	
 <p>Guillotine type</p> <p>Multi-connection head module</p>			38	P2M2HEV0A	
	Guillotine connector	IP65	2 m	335	P8LMH20M2A
	with flying leads		5 m	802	P8LMH20M5A
	multi-cable		9 m	1425	P8LMH20M9A
 <p>Standard Sub-D 25 type</p> <p>Multi-connection head module</p>			60	P2M2HEV0D	
	Sub-D 25 connector	IP40	3 m	435	P8LMH25M3A
	with flying leads		9 m	1425	P8LMH25M9A
	multi-cable	IP65	9 m	1425	P8LMH25B9A


V series valve island : Electrical field bus head modules for AS-i protocol




Standard AS-i protocol (up to 31 nodes) electrical head modules

 <p>Electrical module for 8 outputs max.</p> <ul style="list-style-type: none"> V series islands may have up to 8 solenoid pilots 2 nodes per module, 4 I / 4 O per node 	Input connections	Weight(g)	Order code
	no input	150	P2M2HBVA10800
	8 M8 inputs	200	P2M2HBVA10808A
 <p>Electrical module for 4 outputs max.</p> <ul style="list-style-type: none"> V series islands may have up to 4 solenoid pilots 1 node per module, 4 I / 4 O 	8 inputs on 4 M12	200	P2M2HBVA10808B
	No inputs	150	P2M2HBVA10400
	4 inputs on 4 M12	200	P2M2HBVA10404B

AS-i version 2-1 protocol (up to 62 nodes) electrical head modules


 <p>Electrical module for 6 outputs max.</p> <ul style="list-style-type: none"> V series islands may have up to 6 solenoid pilots 2 nodes per module, 4 I / 3 O per node 	none	150	P2M2HBVA20600
	8 M8 Inputs	200	P2M2HBVA20608A
	8 inputs on 4 M12	200	P2M2HBVA20608B

AS-i head module accessories


Description	Connector type	Weight (g)	Order code
 <p>P8CS0803J</p> <p>P8CSY1212A</p>	Cable quick connect connector		
	M8 Male	25	P8CS0803J
	M12 Male - A coding	25	P8CS1204J
« Y » shape	M12 Male - 2 x M12 Female	25	P8CSY1212A
Addressing cable 1 meter	M12 Male - Jack	100	P8LS12JACK

V series valve island : Electrical field bus head modules for device bus

Electrical modules for 16 outputs
 (The V series modules may have up to 16 solenoid pilot valves)

Description	Bus Protocol	Bus In / Bus Out	Power supply	Weight (g)	Order code
	Profibus DP	M12 - B coding	M12 - A coding	250	P2M2HBVP21600
	For GSD file, go to http://www.parker.com/pneu/moduflex				
	DeviceNet	M12 - A coding	M12 - A coding	250	P2M2HBVD21600
		M12 - B coding		250	P2M2HBVD11600
	For EDS file, go to http://www.parker.com/pneu/moduflex				
	CANopen	M12 - A coding	M12 - A coding	250	P2M2HBVC21600
		M12 - B coding	250	P2M2HBVC11600	
For EDS file, go to http://www.parker.com/pneu/moduflex					
InterBus-S		M23 - 9 Pins	M12 - A coding	300	P2M2HBVS11600

Device Bus connection accessories

Description	Bus Protocol	Connector type	Weight (g)	Order code
	All	M12 - A coding	25	P8CS1205AA
	DeviceNet	M12 - B coding	25	P8CS1205AB
	CANopen			
Bus IN female connector	DeviceNet	M12 - A coding	25	P8CS1205AA
	CANopen			
Bus OUT male connector	DeviceNet	M12 - A coding	25	P8CS1205BA
	CANopen			
Line termination	DeviceNet	M12 - A coding	25	P8BPA00MA
	CANopen			
	Profibus DP	M12 - B coding	25	P8BPA00MB



M12 - A coding connector



M12 - B coding connector

Individual connection valve islands : T series

In a T series valve island, electrical controls are individually connected to each valve module, onto its solenoid pilot.

As an alternative, air pilot valve modules are also available, to be controlled by individual pneumatic signals.



Valve island assembly

As shown by the above illustration, the valve modules are one by one screwed onto each other, starting from the head module. For this task, the single integrated screw is tightened with a torx T8 standard screwdriver.

The pneumatic connectors may be clipped or unclipped at any stage.

With a LED, a manual override and a labelling for each valve pilot (see above illustration), the island front face eases the "man / machine" dialog.

The resulting valve island length is expressed by the drawing below, while further size details and mountings are presented on dimensions pages.

Valve island configuration

The following page presents all valve sizes and functions that may enter into a T series valve island and, for each valve size, a choice of clip-on pneumatic connectors : tubing size, straight, elbow... To receive its pressure supply and collect its exhaust, the island also requires a

pneumatic head and tail module set and sometimes an intermediate module set including 4 configuration plates for different functions. Valve modules may either be solenoid versions or air pilot versions. Mixing both versions into the same valve island is possible.

Valve pilot connections

1 - Solenoid valve modules



In its IP40 version, each solenoid shows Clip connection integrating LED and voltage surge protection. The clip connector with flying leads may be ordered separately with independent or interconnected common.


In its IP67 version, each solenoid shows a M8 connection. Lockable connectors, IP67 protected, with LED voltage surge protection and flying lead cable may be ordered for the required length.

2 - Air pilot valve modules




No connector has to be ordered : each pneumatic pilot port includes its integrated swivable elbow 4 mm OD tube push-in connector.

Typical T series short island for single or double acting small cylinders.



Typical T series islands combining different valve flows and functions

Valve island assembly

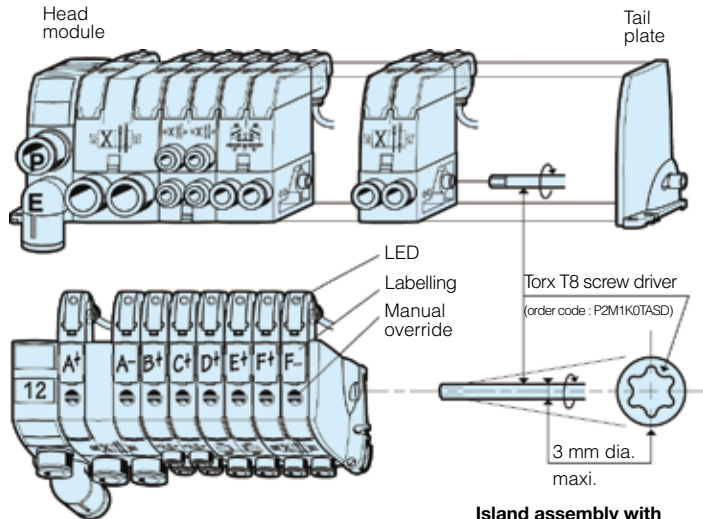

Island mounting and marking for easy man / machine dialog

Island assembly with a single screw per module

Modules and island ordering

Choice between 3 approaches :

1 - Basic modules ordering :

The following page shows these modules supplied without connector, together with the choice of clip-on connectors separately supplied (10 units packs). This approach gives the maximum flexibility.

2 - Complete modules ordering :


Page 265 shows the ordering chart for modules supplied with their connectors.

3 - Assembled island ordering :


Page 268 shows the valve island configurator CD-Rom to specify a valve island that may be delivered assembled.

- Pneumatic head module : width : 32 mm
- Valve module size 1 : width : 25 mm
- Valve module size 2 : width : 37.5 mm
- Intermediate module : width : 25 mm
- Tail plate : width : 16 mm

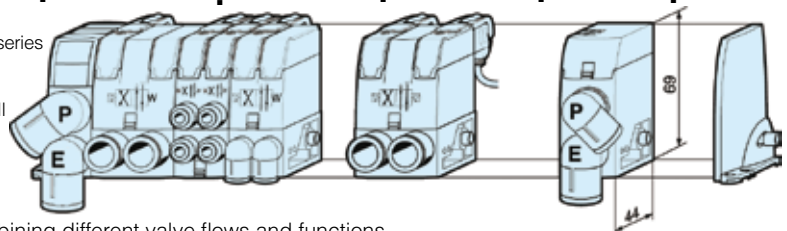

Typical T series high flow island for both small and large cylinders.






Basic modules (without connector)

Valve Modules					Size 1		Size 2	
Symbol	Description	Actuator	Pilot connector	W (g)	Order code	W (g)	Order code	
	4/2 Spring return	Solenoid	M8 Lockable	68	P2M1T4ES2C	74	P2M2T4ES2C	
		Air pilot	Clip	68	P2M1T4ES2CW	74	P2M2T4ES2CW	
	4/2 Double pilot	Solenoid	M8 Lockable	77	P2M1T4EE2C	83	P2M2T4EE2C	
		Air pilot	Clip	77	P2M1T4EE2CW	83	P2M2T4EE2CW	
	2 x 3/2 NC + NC with exhaust check valves	Solenoid	M8 Lockable	80	P2M1TDEE2C	94	P2M2TDEE2C	
		Air pilot	Clip	80	P2M1TDEE2CW	94	P2M2TDEE2CW	
2 x 3/2 NO + NO with exhaust check valves	Solenoid	M8 Lockable	80	P2M1TCEE2C	94	P2M2TCEE2C		
	Air pilot	Clip	80	P2M1TCEE2CW	94	P2M2TCEE2CW		
2 x 3/2 NC + NO with exhaust check valves	Solenoid	M8 Lockable	80	P2M1TEEE2C	94	P2M2TEEE2C		
	Air pilot	Clip	80	P2M1TEEE2CW	94	P2M2TEEE2CW		
2 x 4/2 Spring return with exhaust check valves	Solenoid	M8 Lockable	88	P2M1TJEE2C				
	Air pilot	Clip	88	P2M1TJEE2CW				
3/2 NC with exhaust check valves	Solenoid	M8 Lockable	76	P2M1T3ES2C	90	P2M2T3ES2C		
	Air pilot	Clip	76	P2M1T3ES2CW	90	P2M2T3ES2CW		
4/3 Centre exhaust 2 x 3/2 NC + NC without exhaust check valves	Solenoid	M8 Lockable	80	P2M1TGEE2C	94	P2M2TGEE2C		
	Air pilot	Clip	80	P2M1TGEE2CW	94	P2M2TGEE2CW		
		Air pilot	Clip	70	P2M1TGPP	84	P2M2TGPP	

Island head and intermediate module sets

Valve Modules		Size 2		
Description	W (g)	Order code		
 P2M2HXT01	64	P2M2HXT01		
 P2M2BXT0A	64	P2M2BXT0A		

Clip-On pneumatic connectors *

Valve Modules		Size 1			Size 2	
Description	Tube OD	W (g)	Order code	W (g)	Order code	
	Straight connector	G1/8"	2	FMDG1-1		
		4 mm	2	FMD04-1		
		6 mm	3	FMD06-1	3	FMD06-2
		8 mm			4	FMD08-2
		10 mm			5	FMD10-2
	Elbow connector	G1/8"	3	CMDG1-1		
		4 mm	3	CMD04-1		
		6 mm	5	CMD06-1	5	CMD06-2
		8 mm			6	CMD08-2
		10 mm			7	CMD10-2
	Silencer Plug				5	MMDVA2
			3	PMDXX1	5	PMDXX2

* Fittings and plugs pack quantity : 10

Electrical connectors

M8 connector		Clip connector			
Description	Connector type	Cable length	W (g)	Order code	
Individual Clip-on connector – IP67 Including LED and surge protection 2 Flying leads	M8 / 2 x Flying leads	2 meters	62	P8LS08L226C	
		5 meters	155	P8LS08L526C	
		9 meters	180	P8LS08L926C	
Clip-on connector – IP40 Individual : Including 2 flying leads Multiple : Including 1 common (0 Vdc) and 1 flying lead per connector	1 x Clip connector	1 meter	8	P8LW021C	
		2 x Clip connectors	1 meter	12	P8LW021C02
		4 x Clip connectors	1 meter	20	P8LW021C04
		8 x Clip connectors	1 meter	36	P8LW021C08
Straight cable quick connect to thread connector, IP67 protected	M8		12	P8CS0803J	
		M12	15	P8CS1204J	

Stand-Alone Valve Modules : S series

Very useful to control isolated cylinders, these stand-alone valves module are compact and easy to mount on the machines with neat electrical and pneumatic connections.

As an alternative to electrical controls, valves with air pilots are also available, to be controlled by individual pneumatic signals.



Valve functions

The following page shows all valve sizes and functions and, for each valve size, a choice of clip-on pneumatic connectors : tubing size, straight, elbow, ...

Valve main connections


- Outlets to cylinders (ports 2 and 4) on one side.
- Supply P (port 1) and exhaust E (port 3) on the other side. At port 3, exhaust may be collected or receive a clip-on muffler.



Valve mounting

All valves may be mounted either with side screws or with their integrated retractable brackets.

Side screw mounting



The brackets are then retracted.


Optional foot mounting



The brackets are then extended.

Valve pilot connections


1- Solenoid valve modules

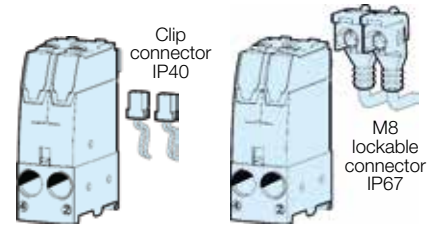

In its IP40 version, each solenoid shows Clip connection integrating LED and voltage surge protection. The clip connector with flying leads may be ordered separately with independent or interconnected common. In its IP67 version, each solenoid shows a M8 connection. Lockable connectors, IP67 protected, with LED voltage surge protection and flying lead cable may be ordered for the required length.

2- Air pilot valve modules

No connector has to be ordered : each pneumatic pilot port includes its integrated swivable elbow 4 mm OD tube push-in connector.



Modules and island ordering

Choice between 2 approaches :


1 - Basic modules ordering :

The following page shows these modules supplied without connector, together with the choice of clip-on connectors separately supplied (10 units packs). This approach gives the maximum flexibility.


2 - Complete modules ordering :

Ordering chart for modules supplied with their pneumatic and electrical connectors and muffler.










Valve module size 1



Valve module size 2





Valve Modules

					Size 1		Size 2	
Symbol	Description	Actuator	Pilot connector	W (g)	Order code	W (g)	Order code	
 <p>Size 1</p>	 <p>4/2 Spring return</p>	Solenoid	M8 Lockable	72	P2M1S4ES2C	78	P2M2S4ES2C	
			Clip		72	P2M1S4ES2CW	78	P2M2S4ES2CW
		4/2 Double pilot	Air pilot		67	P2M1S4PS	73	P2M2S4PS
			Solenoid	M8 Lockable	87	P2M1S4EE2C	93	P2M2S4EE2C
				Clip	87	P2M1S4EE2CW	93	P2M2S4EE2CW
			Air pilot		77	P2M1S4PP	73	P2M2S4PP
 <p>Size 2</p>	 <p>2 x 3/2 NC + NC with exhaust check valves</p>	Solenoid	M8 Lockable	85	P2M1SDEE2C	91	P2M2SDEE2C	
			Clip		85	P2M1SDEE2CW	91	P2M2SDEE2CW
			Air pilot		75	P2M1SDPP	81	P2M2SDPP
	 <p>2 x 3/2 NO + NO with exhaust check valves</p>	Solenoid	M8 Lockable	85	P2M1SCEE2C	91	P2M2SCEE2C	
			Clip		85	P2M1SCEE2CW	91	P2M2SCEE2CW
			Air pilot		75	P2M1SCPP	81	P2M2SCPP
 <p>2 x 3/2 NC + NO with exhaust check valves</p>	Solenoid	M8 Lockable	85	P2M1SEEE2C	91	P2M2SEEE2C		
		Clip		85	P2M1SEEE2CW	91	P2M2SEEE2CW	
		Air pilot		75	P2M1SEPP	81	P2M2SEPP	
 <p>3/2 NC with exhaust check valves</p>	Solenoid	M8 Lockable	80	P2M1S3ES2C	86	P2M2S3ES2C		
		Clip		80	P2M1S3ES2CW	86	P2M2S3ES2CW	
		Air pilot		70	P2M1S3PS	76	P2M2S3PS	
 <p>4/3 Centre exhaust</p>	Solenoid	M8 Lockable	85	P2M1SGEE2C	91	P2M2SGEE2C		
	 <p>2 x 3/2 NC + NC without exhaust check valves</p>		Clip	85	P2M1SGEE2CW	91	P2M2SGEE2CW	
		Air pilot		75	P2M1SGPP	81	P2M2SGPP	



Clip-On pneumatic connectors *

Valve Modules

		Size 1			Size 2	
Description	Tube OD	W (g)	Order code	W (g)	Order code	
 <p>Straight connector</p>	G1/8"	2	FMDG1-1			
	4 mm	2	FMD04-1			
	6 mm	3	FMD06-1	3	FMD06-2	
	8 mm			4	FMD08-2	
	10 mm			5	FMD10-2	
	12 mm			6	FMD12-2	
 <p>Elbow connector</p>	G1/8"	3	CMDG1-1			
	4 mm	3	CMD04-1			
	6 mm	5	CMD06-1	5	CMD06-2	
	8 mm			6	CMD08-2	
	10 mm			7	CMD10-2	
	12 mm			8	CMD12-2	
Silencer		3	MMDVA1	5	MMDVA2	
Plug		3	PMDXX1	5	PMDXX2	

* Fittings and plugs pack quantity : 10

Electrical connectors

		Connector type	Cable length	W (g)	Order code
 <p>M8 connector</p>  <p>Clip connector</p>	Description	M8 / 2 x Flying leads	2 meters	62	P8LS08L226C
	Individual Clip-on connector – IP67		5 meters	155	P8LS08L526C
	Including LED and surge protection		9 meters	180	P8LS08L926C
	2 Flying leads	1 x Clip connector	1 meter	8	P8LW021C
	Clip-on connector – IP40	2 x Clip connectors	1 meter	12	P8LW021C02
	Individual : Including 2 flying leads	4 x Clip connectors	1 meter	20	P8LW021C04
	Multiple : Including 1 common (0 Vdc) and 1 flying lead per connector	8 x Clip connectors	1 meter	36	P8LW021C08
	Straight cable quick connect to thread connector, IP67 protected	M8		12	P8CS0803J
		M12		15	P8CS1204J

Peripheral Valve Modules : P series

Four additional peripheral modules complete the valve system in order to facilitate the installation of specific cylinder controls :


- Dual flow control, for cylinder speed adjusting;
- Dual pilot operated check valve, for cylinder positioning;
- Pressure regulator, for cylinder thrust adjusting;
- Vacuum generator, for vacuum pad controls.



Module function selection


Dual flow control

By controlling the exhaust flows of a double acting cylinder, this module can adjust both speeds : forward and backward.




Dual pilot operated check valve

Combined with a double 3/2 NC + NC valve, this module will block flows and stop cylinder movement as soon as the valve outputs are both exhausted. Better than a 3 position closed centre valve, it provides accurate positioning when mounted close to the cylinder.

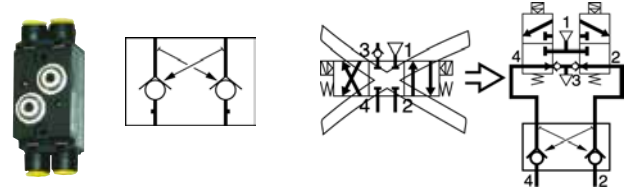

Pressure regulator

The thrust developed by a cylinder often requires adjustment by controlling the pressure to the front or back of the piston. This pressure regulator module enables manual adjustment of pressure on one side of the piston, with visual indication provided by the pressure gauge.

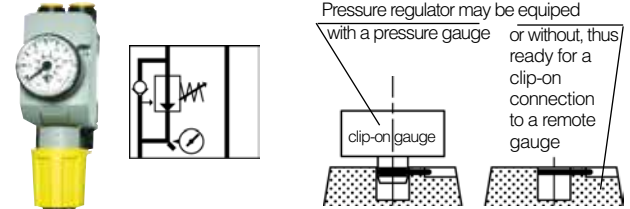


Vacuum generator

This multi-purpose module controls vacuum pads with a choice between two basics schematics :

- Controlled with only one 3/2 NC valve, the vacuum generator provides vacuum to the pads during valve actuation and then blow-off supplied from an integrated chamber.
- Controlled with a double 3/2 NC + NC, the vacuum generator provides vacuum during the first valve actuation, and then strong blow-off from the second valve.

Integrated blow-off flow controller. Optional plug-in vacuum sensor.

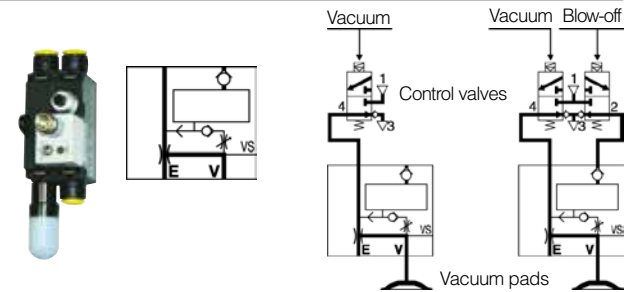


Module installation selection







Peripheral modules may either be mounted :

- Plugged into the valve module through double male unions;
- Or in line, close to the cylinder to control it better.

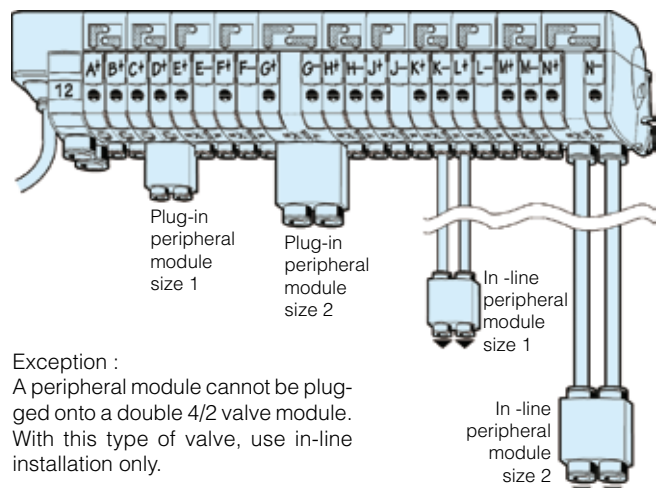




Exception :
A peripheral module cannot be plugged onto a double 4/2 valve module. With this type of valve, use in-line installation only.

Basic peripheral modules (without connector)




Peripheral Modules		Size 1		Size 2			
Symbol	Description	Weight (g)	Order code	Weight (g)	Order code		
	Dual flow control	50	P2M1PXFA	50	P2M2PXFA		
	Dual P.O. check valve	50	P2M1PXCA	50	P2M2PXCA		
	Pressure regulator	Pressure range	Gauge				
		0 - 2 bar	0 - 4 bar	135	P2M1PXSR	135	P2M2PXSR
			Without	105	P2M1PXST	165	P2M2PXST
		0 - 4 bar	0 - 7 bar	135	P2M1PXSM	135	P2M2PXSM
			Without	105	P2M1PXSL	165	P2M2PXSL
		0 - 8 bar	0 - 11 bar	135	P2M1PXSG	135	P2M2PXSG
	Without	105	P2M1PXSN	165	P2M2PXSN		
	90% Vacuum generator	30	P2M1PXVA				

Clip-On pneumatic connectors *

Valve Modules		Size 1		Size 2		
Description	Tube OD	Weight (g)	Order code	Weight (g)	Order code	
	Straight connector	G1/8"	2	FMDG1-1		
		4 mm	2	FMD04-1		
		6 mm	3	FMD06-1	3	FMD06-2
		8 mm			4	FMD08-2
		10 mm			5	FMD10-2
		12 mm			6	FMD12-2
	Elbow connector	G1/8"	3	CMDG1-1		
		4 mm	3	CMD04-1		
		6 mm	5	CMD06-1	5	CMD06-2
		8 mm			6	CMD08-2
		10 mm			7	CMD10-2
		12 mm			8	CMD12-2
	Double male union	5	HMDXX1	8	HMDXX2	
	Silencer	3	MMDVA1			
	Plug	3	PMDXX1	5	PMDXX2	

* Fittings and plugs pack quantity : 10

Clip-on accessories


Description	Connection	Pressure range	Weight (g)	Order code	
	Clip-on	0 to 4 bar	30	P2M1K0GT	
		0 to 7 bar	30	P2M1K0GL	
		0 to 11 bar	30	P2M1K0GN	
	Analog (1 - 5 Vdc) Vacuum Sensor	Diam. 4 mm tube	0 to -1 bar	25	MPS-V8T4-AG
	Flying lead 2 meter cable	Diam. 6 mm tube	0 to -1 bar	25	MPS-V8T-AG
	Dig. PNP / Ana (4 - 20 mA) Vacuum Sensor	G 1/8" male	0 to -1 bar	45	MPS-V34G-PCI
	15 cm cable - M8 4 pin's connector				

Moduflex Valve Island e-Configurator

The comprehensive **Moduflex Valve CAD e-Configurator** enable online Moduflex Valve Island configuration giving Bill of Material and 3D or 2D CAD download

Go to <http://www.parker.com/pde/cad> to start

Stacking Air Valve
 Moduflex P2M Series

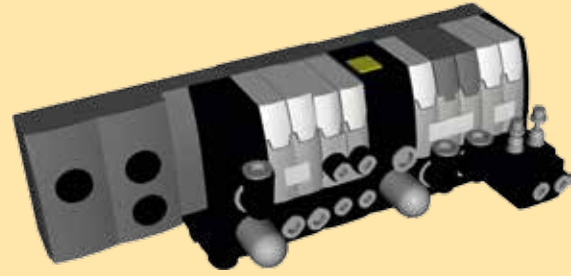

Valve island configuration practice :

Moduflex Assembly

Model Number
 P2MAVB2C8MM05

SELECT YOUR CONFIGURATION
Options marked with (*) are required items.
 (Configuration subject to change without notice.)

Island Assembly: P2MA - Moduflex Island Assembly

Style*: V - ValveTronic Collective Wired Valve

Wiring / Bus Protocol*: B - Bus

Bus Protocol Module*: ASI 2 1 - 8 (PnP) single inputs on eight M8 connectors, 6 solenoid outputs, 2 nodes

NOTE: Maximum number of solenoids for this manifold is 6. Single Solenoid Valve = 1 Output. Double Solenoid Valve = 2 Outputs

Bus Model Number: P2M2HEVA20609A

Pilot Source*: 2 - Internal Supply / External Exhaust


Inlet Port Type (No. 1 Pressure)*: CS - 3mm Elbow Fitting

Exhaust Port Type (No. 3 Exhaust)*: MM - Clip-In Muffler


Number of Stations*: 05

Station 1*	Valve	P2M1V4EE2CV00R6	<input type="button" value="Configure"/>	<input type="button" value="Copy"/>	<input type="button" value="Reset"/>
Station 2*	Valve	P2M1V4EE2CV00F4	<input type="button" value="Configure"/>	<input type="button" value="Copy"/>	<input type="button" value="Reset"/>
Station 3*	Intermediate Module	P2M2B3CV02F8MM	<input type="button" value="Configure"/>	<input type="button" value="Copy"/>	<input type="button" value="Reset"/>
Station 4*	Valve	P2M2V4EE2CV00C8	<input type="button" value="Configure"/>	<input type="button" value="Copy"/>	<input type="button" value="Reset"/>
Station 5*	Valve	P2M1V0EE2CV00JJ	<input type="button" value="Configure"/>	<input type="button" value="Copy"/>	<input type="button" value="Reset"/>
	Dual Flow Control	P2M1FXFAJUF4			

Step 1 : Head and tail definition

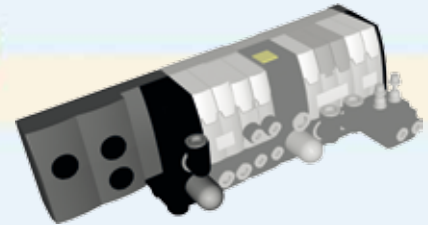

Step 2 : Valves definition

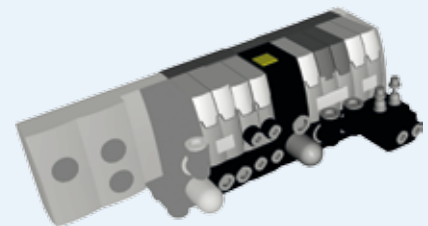

Get the bill of material

By clicking on button :

1. View the bill of material :
 - Head and Tail Set
 - Valves detail
2. Click to Print

Parker eConfigurator™
The Asst 11 31 12 16 17 18 19 20 21 22

Model Number: P2MAVB2C8MM05

Configuration Summary

Style: V - ValveTronic Collective Wired Valve

Wiring / Bus Protocol: B - Bus

Bus Protocol Module: ASI 2 1 - 8 (PnP) single inputs on eight M8 connectors, 6 solenoid outputs, 2 nodes

Bus Model Number: P2M2HEVA20609A

Pilot Source: 2 - Internal Supply / External Exhaust

Inlet Port Type (No. 1 Pressure): CS - 3mm Elbow Fitting

Exhaust Port Type (No. 3 Exhaust): MM - Clip-In Muffler

Number of Stations: 05

Station 1	P2M1V4EE2CV00R6	Valve
Station 2	P2M1V4EE2CV00F4	Valve
Station 3	P2M2B3CV02F8MM	Intermediate Module
Station 4	P2M2V4EE2CV00C8	Valve
Station 5	P2M1V0EE2CV00JJ	Valve
	P2M1FXFAJUF4	Dual Flow Control

Download 2D or 3D CAD

By clicking on button :

1. Select to view, download or e-mail your CAD file
2. Select your best file format
3. Submit Request

Parker eConfigurator 3D CAD Generator

Do you wish to:

View drawing*

Download drawing file (Note: You may be required to add <http://www.parker.com> to your trusted sites in IE and/or lower your internet security settings to low if you encounter an error with the download)

Email drawing file

Please select the Format for your Drawing File: STEP AP214

*The file selected will be a 3D model in a 3D CAD file format (e.g. IGS)

Please note the following:

- Using Autodesk's secure internet site to host the 3D files
- Internet Explorer's security settings set at the Advanced level (view Helpdesk article ID CAD-00000000 for details)

ENGINEERING YOUR SUCCESS.

1 - Multi-connector or sub-D 25 valve island

Multi-connector or sub-D 25 electrical head module width : 15 mm



Head and tail pneumatic module set width : 48 mm

Modules size 1 width : 25 mm

Modules size 2 width : 37.5 mm

Intermediate module width : 25 mm


Island total width depending on valve composition

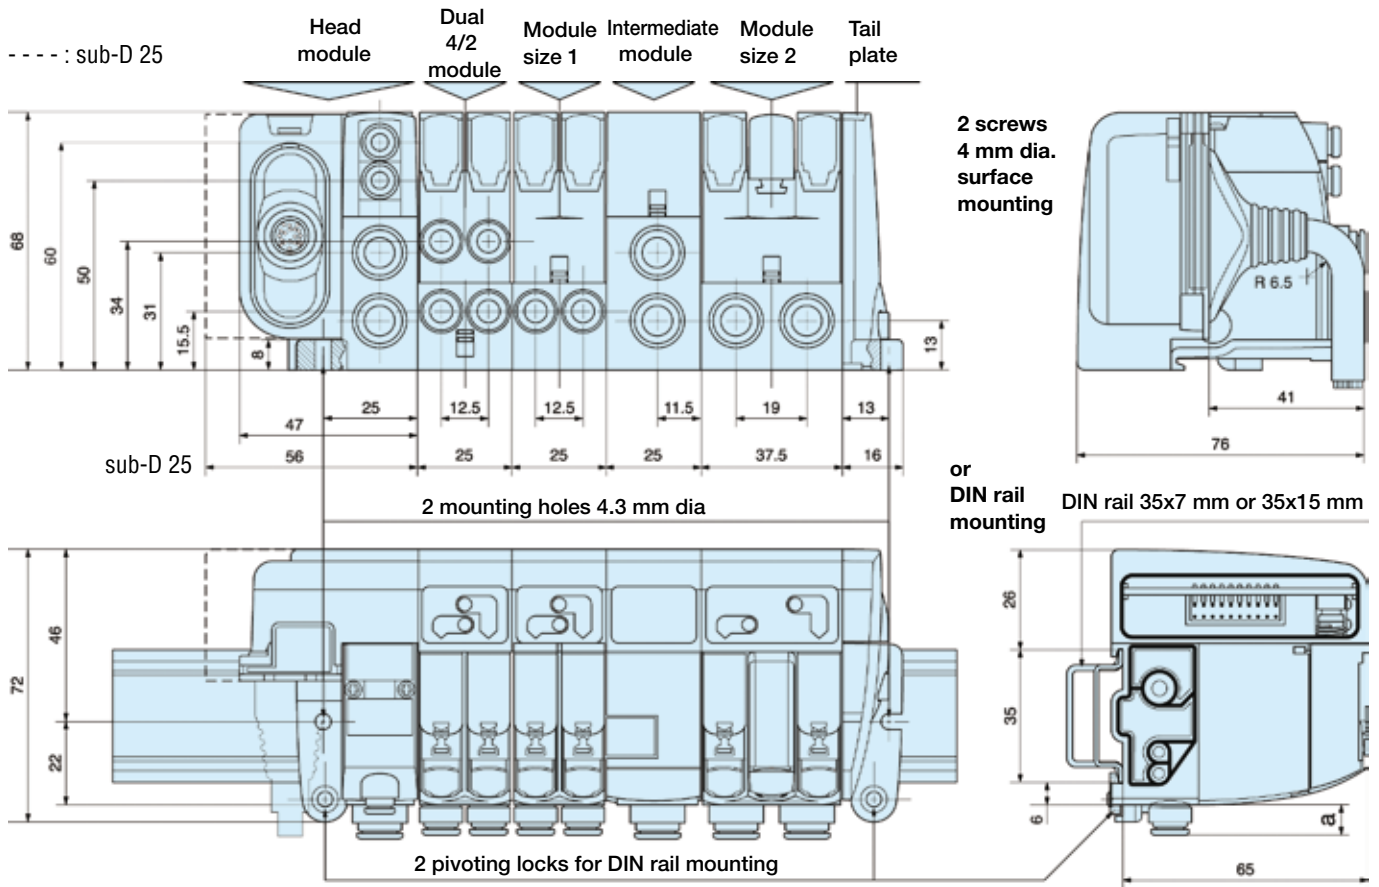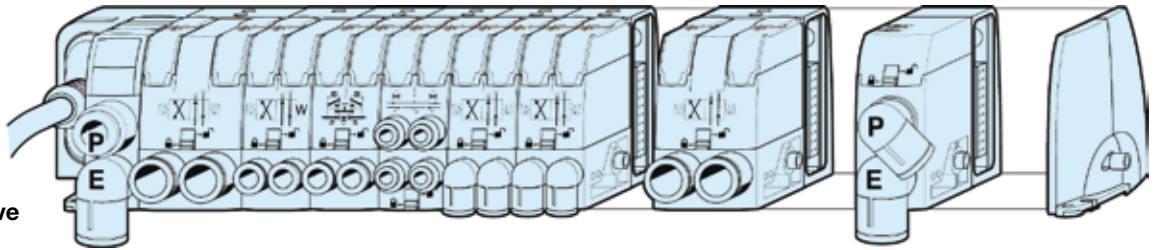

Special case : 4/3 closed centre function within island version : Add the dimensions of the dual P.O. check valve module plugged into the island.


Island head and intermediate modules

	a	b	c
6 mm tube OD	8	13	16
8 mm tube OD	9	16	19
10 mm tube OD	13	18	22
12 mm tube OD	13	19	25
muffler		40	

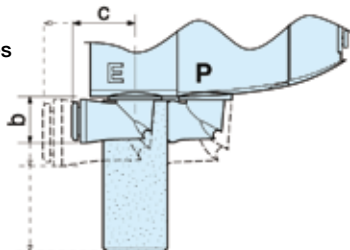

Island valves modules

	OD tube	a	b	c
Size 1 modules	4 mm	8	10	12
	6 mm	8	13	16
Size 2 modules	8 mm	9	16	19
	10 mm	13	18	22



2 - Field bus connected islands


Electrical field bus head module width : 62 mm

Head and tail pneumatic module set width : 48 mm


Modules size 1 width : 25 mm

Modules size 2 width : 37.5 mm




Intermediate module width : 25 mm

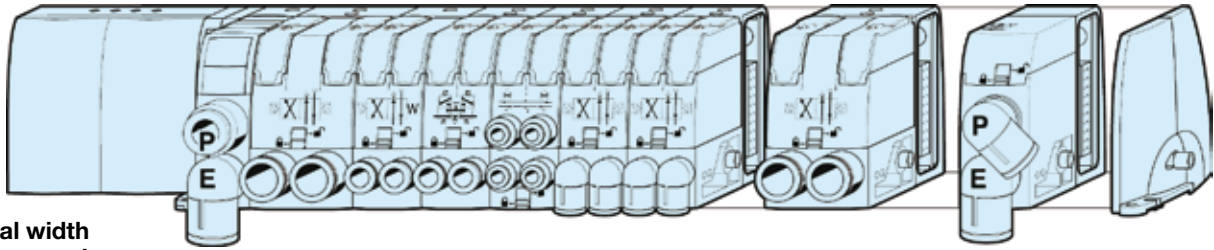

Island total width depending on valve composition

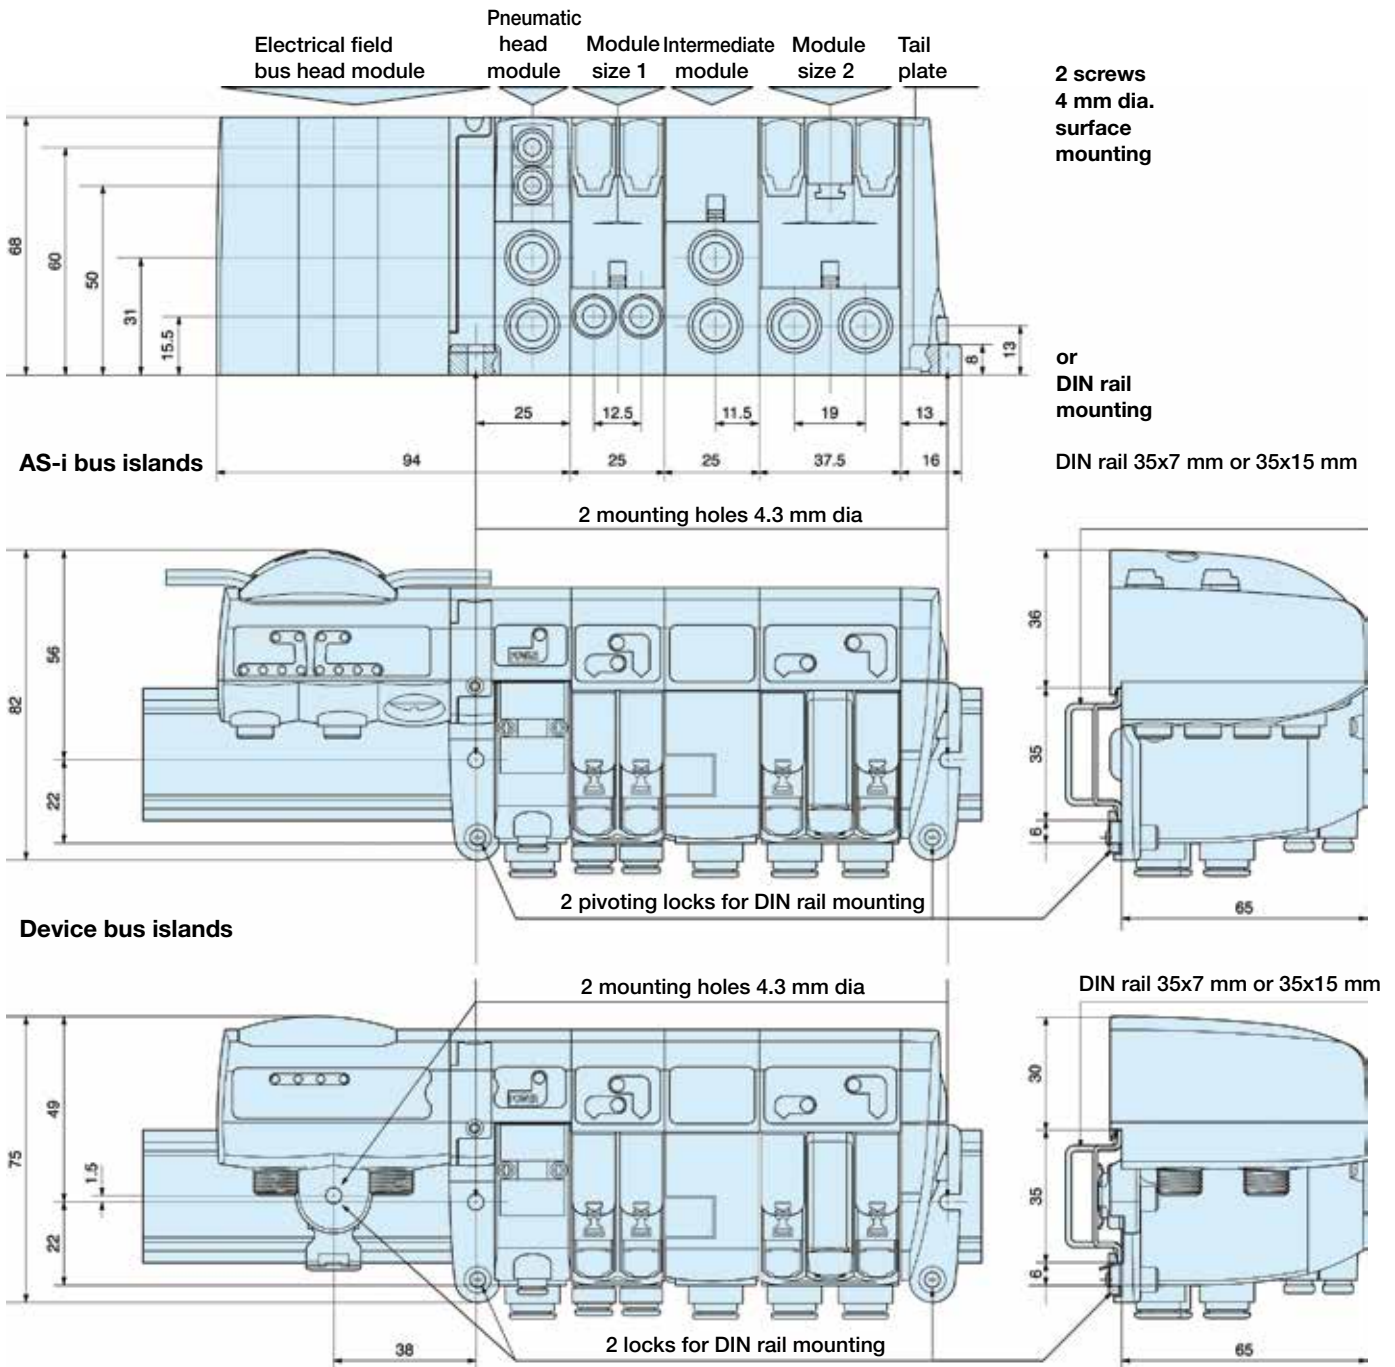


Island total width depending on valve composition

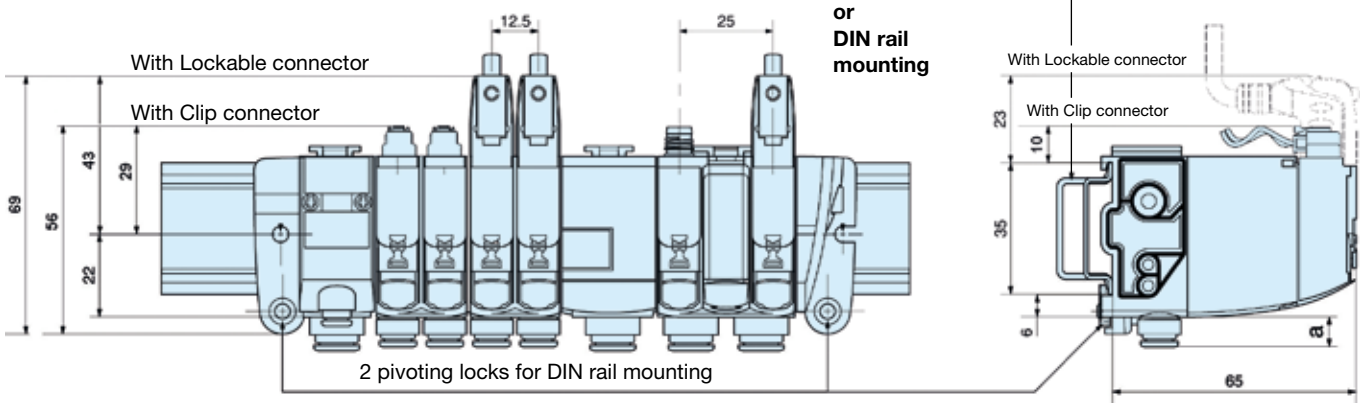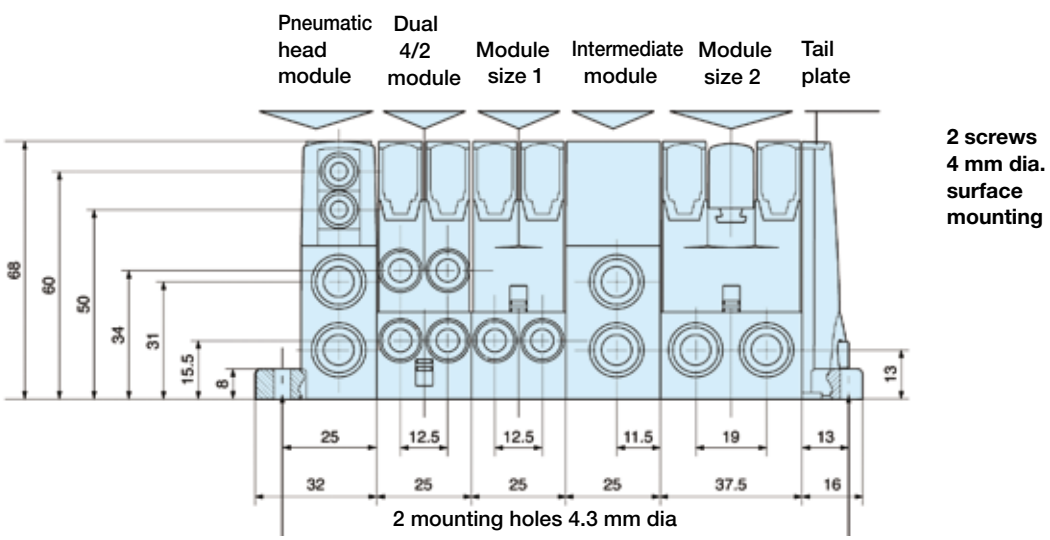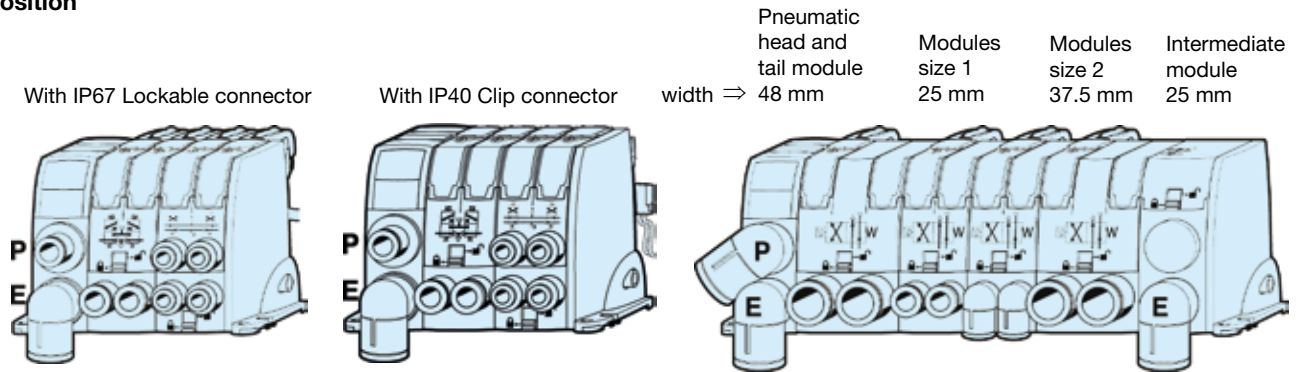

Special case : 4/3 closed centre function within island version :
Add the dimensions of the dual P.O. check valve module plugged into the island.


Island head and intermediate modules

	a	b	c
6 mm tube OD	8	13	16
8 mm tube OD	9	16	19
10 mm tube OD	13	18	22
12 mm tube OD	13	19	25
muffler		40	

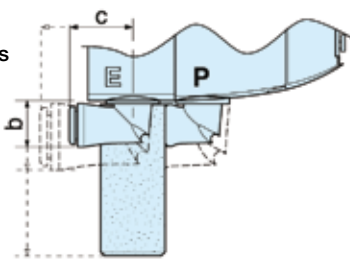


Island valves modules

	OD tube	a	b	c
Size 1 modules	4 mm	8	10	12
	6 mm	8	13	16
Size 2 modules	8 mm	9	16	19
	10 mm	13	18	22




Stand-alone valve size 1


surface mounting with screws
4 mm dia. into retractable brackets 3 mm thick

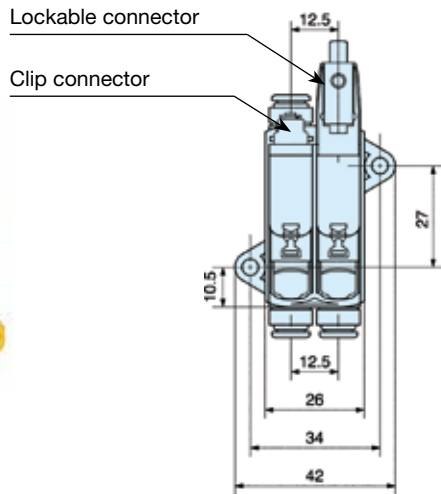


or side mounting with 2 screws 4 mm dia.

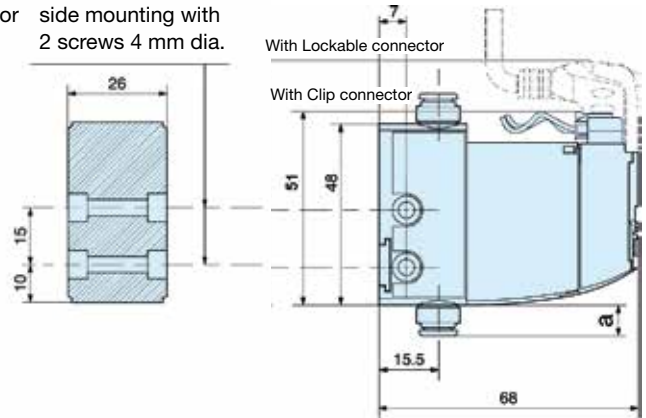

Stand-alone valve size 2

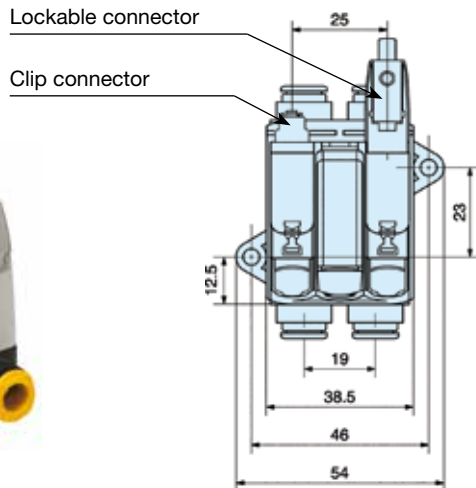


or side mounting with 2 screws 4 mm dia.

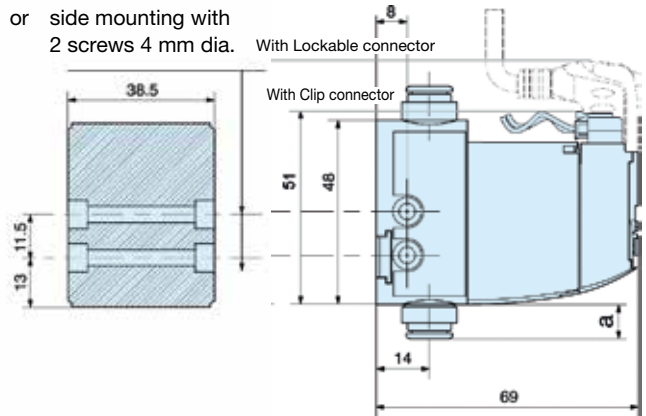


Dimensions and mountings of the stand-alone valves 4/2, double and single 3/2, 4/3 vented centre and 4/3 pressure centre.

Special case : 4/3 closed centre. Add the dual P.O. check valve module that has been plugged in the basic valve.


		a	b	c
Size 1 modules	4 mm tube OD	8	10	12
	6 mm tube OD	8	13	16
	muffler		31	
Size 2 modules	8 mm tube OD	9	16	19
	10 mm tube OD	13	18	22
	muffler		40	

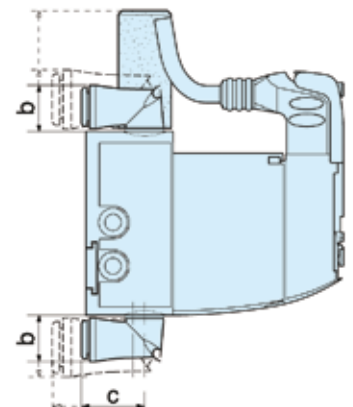

Reminder : peripheral modules may either be plugged in a valve or an island or mounted in line separate from the valve





peripheral module plugged in a valve or an island

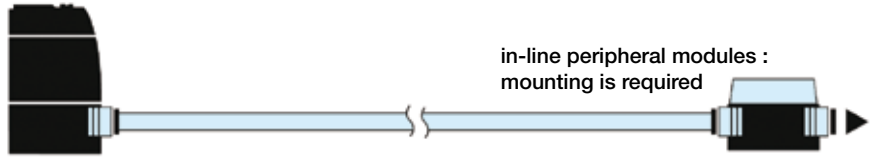


in-line peripheral modules : mounting is required

Dual flow control module size 1




possible mounting with 2 screws 3 mm dia.





Pressure regulation module size 1



- with gauge



mounting with 2 screws 4 mm dia. on retractable brackets


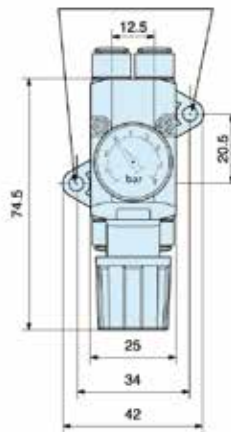


- without gauge



swivel elbow push-in connector 4 mm OD tube



Dual P.O. check valve module size 1




possible mounting with 2 screws 3 mm dia.



Dual flow control module size 2




possible mounting with 2 screws 3 mm dia.




Pressure regulation module size 2



- with gauge



- without gauge






mounting with 2 screws 4 mm dia.
on retractable brackets

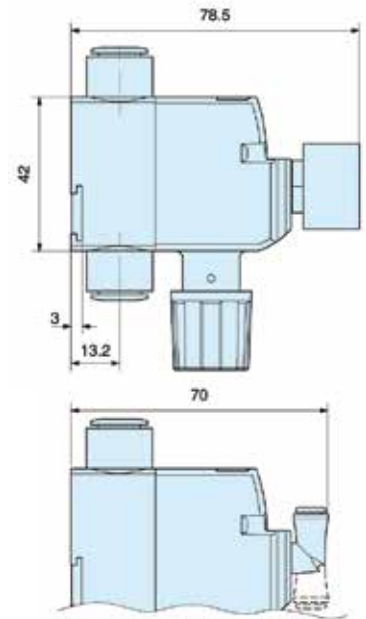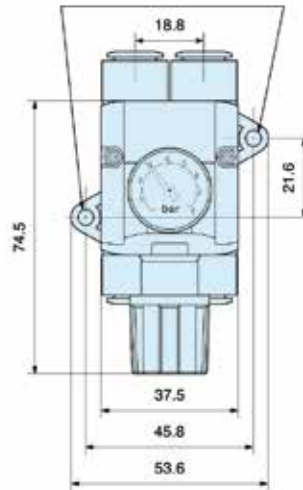

swivel elbow push-in
connector 4 mm OD tube

Dual P.O. check valve module size 2

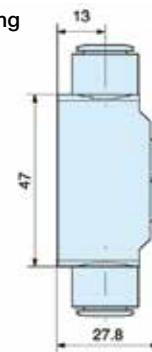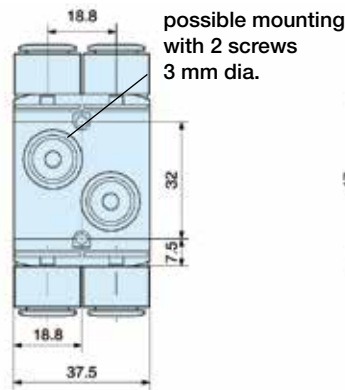

Vacuum generator module

In-line

With Moduflex valve

